

FORM PTO-1390
(REV 12-29-99)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

Mo-6064/LeA 33,087

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

To Be Assigned **09/720274**

INTERNATIONAL APPLICATION NO.

PCT/EP99/04060

INTERNATIONAL FILING DATE

June 12, 1999

PRIORITY DATE CLAIMED

June 26, 1998

TITLE OF INVENTION Flame Resistant Polycarbonate/ABS Plastic Molding Materials

APPLICANT(S) FOR DO/EO/US ECKEL, Thomas; ZOBEL, Michael and WITTMANN, Dieter

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

Abstract

Form PTO 1449 with references

To Be Assigned

PCT/EP99/04060

Mo-6064/LeA 33,087

17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :**

Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO \$970.00

International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO \$840.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but
international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS** PTO USE ONLY

\$ 860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$ 0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	9 - 20 =	0	X \$18.00
Independent claims	1 - 3 =	0	X \$78.00

\$ 0.00

\$ 0.00

MULTIPLE DEPENDENT CLAIM(S) (if applicable) + \$260.00

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 860.00

Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL =

\$

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$ 0.00

TOTAL NATIONAL FEE =

\$ 860.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

\$ 40.00

TOTAL FEES ENCLOSED =

\$ 900.00

Amount to be

refunded: \$

charged: \$

a. ☐ A check in the amount of \$_____ to cover the above fees is enclosed.

b. ☒ Please charge my Deposit Account No. 13-3848 in the amount of \$ 900.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 13-3848. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO

Aron Preis
Bayer Corporation
Patent Department
100 Bayer Road
Pittsburgh, PA 15205-9741

SIGNATURE

Aron Preis

NAME

29,426

REGISTRATION NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES RECEIVING OFFICE

JCO1 Rec'd PCT/PTO 21 DEC 2000	
Date	December 21, 2000
International Application No.	PCT/EP99/04060
Attorney Docket No.	Mo-6064/LeA 33,087

09/720274

I. Certification under 37 CFR 1.10 (if applicable)

EL062671672US
Express Mail mailing number

December 21, 2000
Date of Deposit

I hereby certify that the application/correspondence attached hereto is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Assistant Commissioner for Patents, Washington, D.C. 20231.


Signature of person mailing correspondence

Donna J. Veatch
Typed or printed name of person mailing correspondence

II. ☒ New International Application

TITLE	FLAME RESISTANT POLYCARBONATE/ABS PLASTIC MOLDING MATERIALS
-------	---

Earliest priority date (Day/Mon/Year)
(26/06/1998)

SCREENING DISCLOSURE INFORMATION: In order to assist in screening the accompanying international application for purposes of determining whether a license for foreign transmittal should and could be granted and for other purposes, the following information is supplied. (Note: check as many boxes as apply):

- A. ☒ The invention disclosed was not made in the United States.
- B. ☒ There is no prior U.S. application relating to this invention.
- C. ☐ The following prior U.S. application(s) contain subject matter which is related to the invention disclosed in the attached international application. (NOTE: priority to these applications may or may not be claimed on form PCT/RO/101 (Request) and this listing does not constitute a claim for priority.)

application no.		filed on	
application no.		filed on	

- D. ☐ The present international application ☐ contains additional subject matter not found in the prior U.S. application(s) identified in paragraph C. above. The additional subject matter is found on pages and ☐ DOES NOT ALTER ☐ MIGHT BE CONSIDERED TO ALTER the general nature of the invention in a manner which would require the U.S. application to have been made available for inspection by the appropriate defense agencies under 35 U.S.C. 181 and 37 CFR 5.1. See 37 CFR 5.15

III. ☐ A Response to an Invitation from the RO/US. The following document(s) is(are) enclosed:

- A. ☐ A Request for An Extension of Time to File a Response
- B. ☐ A Power of Attorney (General or Regular)
- C. ☐ Replacement pages:

pages		of the request (PCT/RO/101)	pages		of the figures
pages		of the description	pages		of the abstract
pages		of the claims			

- D. ☐ Submission of Priority Documents


Priority document		Priority document	
-------------------	--	-------------------	--

- E. ☐ Fees as specified on attached Fee Calculation sheet form PCT/RO/101 annex

IV. ☐ A Request for Rectification under PCT 91 ☐ A Petition ☐ A Sequence Listing Diskette

- V. ☒ Other (please specify): Preliminary Amendment with Abstract
Form PTO 1449 w/references

The person
signing this
form is the:

<input type="checkbox"/> Applicant	Aron Preis
<input checked="" type="checkbox"/> Attorney/Agent (Reg. No.) 29,426	Typed name of signer 
<input type="checkbox"/> Common Representative	Signature

09/720274
JC01 Rec'd PCT/PTO 21 DEC 2000

PATENT APPLICATION
Mo-6064
LeA 33,087

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION OF)
THOMAS ECKEL ET AL) PCT/EP99/04060
SERIAL NUMBER: TO BE ASSIGNED)
FILED: HEREWITH)
TITLE: FLAME RESISTANT POLYCAR-)
BONATE/ABS PLASTIC MOLDING)
MATERIALS)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231
Sir:

Prior to the examination of the subject patent application, kindly amend the enclosed, English language translation thereof as follows:

IN THE SPECIFICATION:

Please delete the title of the translated document appearing in page 1 and insert therefor a revised title reading: --Flame Resistant Polycarbonate/ABS Plastic Molding Materials--;


And in page 30, a page containing an abstract, delete the title and insert the following in its stead: --Flame Resistant Polycarbonate/ABS Plastic Molding Materials--.

"Express Mail" mailing label number EL062671672US
Date of Deposit December 21, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231

Donna I. Veatch

(Name of person mailing paper or fee)


Signature of person mailing paper or fee)

IN THE CLAIMS:

In Claim 3, line 1 delete "claims 1 and 2 " and insert, therefor, --Claim 1--.

In Claim 4, line 1, delete "claims 1 to 3 " and insert, therefor, --Claim 1--.

In Claim 5, line 1, delete "the preceding claims" and insert, therefor,
--Claim 1--.

In Claim 6, line 1, delete "the preceding claims" and insert, therefor,
--Claim 1--.

In Claim 7, line 1, delete "the preceding claims" and insert, therefor,
--Claim 1--.

In Claim 8, line 1, delete "the preceding claims" and insert, therefor,
--Claim 1--.

Cancel Claims 9, 10 and 11.

Add the following:

--12. A molded article comprising the composition of Claim 1.--

REMARKS


The amendment seeks to render the translated application in better conformance with U.S. practice. A page containing the amended Abstract of the Disclosure is enclosed.

An early examination on the merits is respectfully solicited.

Respectfully submitted,

THOMAS ECKEL
MICHAEL ZOBEL
DIETER WITTMANN

By


Aron Preis
Attorney for Applicants
Reg. No. 29,426

Bayer Corporation
100 Bayer Road
Pittsburgh, Pennsylvania 15205-9741
(412) 777-2343
FACSIMILE PHONE NUMBER:
(412) 777-5449
s:\ks\AP3378

FLAME RESISTANT POLYCARBONATE/
ABS PLASTIC MOLDING MATERIALS

ABSTRACT OF THE DISCLOSURE

The present invention relates to polycarbonate/ABS moulding compositions with incorporated phosphazenes which exhibit excellent flame resistance and very good processing characteristics, wherein the graft polymer is produced by bulk, solution or bulk/suspension polymerization processes.

- 1 -

Flame-resistant polycarbonate/ABS moulding compositions

The present invention relates to polycarbonate/ABS moulding compositions with incorporated phosphazenes which exhibit excellent flame resistance and very good processing characteristics, wherein the graft polymer is produced by bulk, solution or bulk/suspension polymerisation processes.

DE-A 196 16 968 describes polymerisable phosphazene derivatives, a process for the production thereof and the use thereof as curable binders for lacquers, coatings, fillers, surfacing compositions, adhesives, mouldings or films.

WO 97/400 92 describes flameproofed moulding compositions prepared from thermoplastic polymers and unsubstituted phosphazenes (of the type $PN_{n-x}H_{1-y}$).

EP-A 728 811 describes a thermoplastic blend consisting of aromatic polycarbonate, graft copolymer, copolymer and phosphazenes which exhibits good flameproofing properties, impact strength and heat resistance.

The object of the present invention is to provide polycarbonate/ABS moulding compositions having excellent flame resistance and excellent processing characteristics such as good flow behaviour and reduced formation of deposits on the mould during processing. This range of properties is required in particular for applications in data processing, such as for example casings for monitors, printers, copiers *etc.*.

It has now been found that PC/ABS moulding compositions which contain phosphazenes in combination with diene rubber based graft polymer produced by bulk, solution or bulk/suspension polymerisation processes exhibit the desired properties.

"Express Mail" mailing label number EI.062671672USDate of Deposit December 21, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231

Donna J. Veatch


(Name of person mailing paper or fee)




Signature of person mailing paper or fee

The present invention accordingly provides thermoplastic moulding compositions containing

- 5 A) 40 to 99, preferably 60 to 98.5 parts by weight of aromatic polycarbonate and/or polyester carbonate
- B) 0.5 to 60, preferably 1 to 40, in particular 2 to 25 parts by weight of graft polymer produced by bulk, solution or bulk/suspension polymerisation processes of
- 10 B.1) 50 to 99, preferably 65 to 98 wt.% of one or more vinyl monomers on
- B.2) 50 to 1, preferably 35 to 2 wt.% of one or more grafting backbones having a glass transition temperature of $<10^{\circ}\text{C}$, preferably of $<0^{\circ}\text{C}$, particularly preferably of $<-10^{\circ}\text{C}$,
- 15 C) 0 to 45, preferably 0 to 30, particularly preferably 2 to 25 parts by weight of at least one thermoplastic polymer selected from the group comprising vinyl (co)polymers and polyalkylene terephthalates,
- D) 0.1 to 50, preferably 2 to 35, in particular 5 to 25 parts by weight of at least one component selected from the group comprising phosphazenes of the formulae

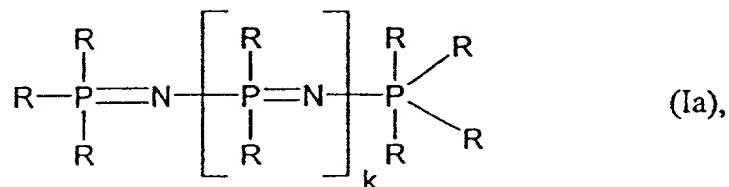

5



(Ib),

in which

10

R is in each case identical or different and denotes amino, C₁ to C₆ alkyl, in each case optionally halogenated, preferably halogenated with fluorine, or C₁ to C₈ alkoxy, C₅ to C₆ cycloalkyl, C₆ to C₂₀ aryl, preferably phenyl or naphthyl, C₆ to C₂₀ aryloxy, preferably phenoxy, naphthyloxy, or C₇ to C₁₂ aralkyl, preferably phenyl-C₁-C₄-alkyl, in each case optionally substituted by alkyl, preferably C₁-C₄ alkyl, and/or halogen, preferably chlorine, bromine,

15

k denotes 0 or a number from 1 to 15, preferably a number from 1 to 10,

20

E) 0 to 5, preferably 0.1 to 1, particularly preferably 0.1 to 0.5 parts by weight of fluorinated polyolefin.

Component A

25


Component A aromatic polycarbonates and/or aromatic polyester carbonates which are suitable according to the invention are known from the literature or may be produced using processes known from the literature (*c.f.* in relation to the production of aromatic polycarbonates, for example Schnell, *Chemistry & Physics of Polycarbonates*, Interscience Publishers, 1964 and DE-AS 1 495 626, DE-OS 2 232 877, DE-OS 2 703 376, DE-OS 2 714 544, DE-OS 3 000 610, DE-OS

30

3 832 396; in relation to the production of aromatic polyester carbonates for example DE-OS 3 077 934).


Aromatic polycarbonates are produced for example by reacting diphenols with carbonic acid halides, preferably phosgene, and/or with aromatic dicarboxylic acid dihalides, preferably benzenedicarboxylic acid dihalides, by the phase interface process, optionally using chain terminators, for example monophenols, and optionally using trifunctional or greater than trifunctional branching agents, for example triphenols or tetraphenols.

Diphenols for the production of the aromatic polycarbonates and/or aromatic polyester carbonates are preferably those of the formula (III)

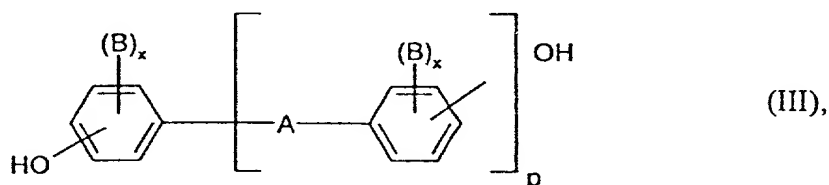


wherein

A means a single bond, C₁-C₅ alkylene, C₂-C₅ alkylidene, C₅-C₆ cycloalkylidene, -O-, -SO-, -CO-, -S-, -SO₂-, C₆-C₁₂ arylene, onto which further aromatic rings optionally containing heteroatoms may be fused, or a residue of the formula (IV) or (V)

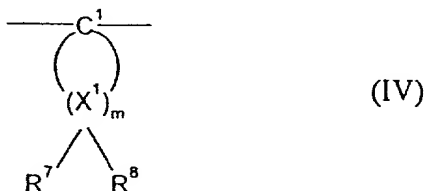

5

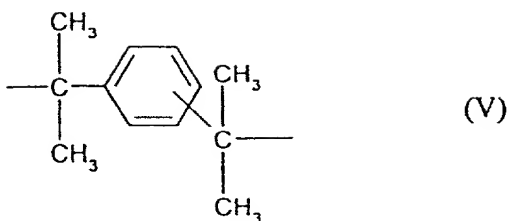

10 B in each case means C₁-C₁₂ alkyl, preferably methyl, halogen, preferably chlorine and/or bromine

x in each case mutually independently mean 0, 1 or 2,

15 p means 1 or 0 and

R⁷ and R⁸ individually selectably, mutually independently for each X¹, mean hydrogen or C₁-C₆ alkyl, preferably hydrogen, methyl or ethyl,

20 X¹ means carbon and

m means an integer from 4 to 7, preferably 4 or 5, providing that R⁷ and R⁸ are simultaneously alkyl on at least one atom X¹.

25 Preferred diphenols are hydroquinone, resorcinol, dihydroxydiphenols, bis-(hydroxyphenyl)-C₁-C₅-alkanes, bis-(hydroxyphenyl)-C₅-C₆-cycloalkanes, bis-(hydroxyphenyl) ethers, bis-(hydroxyphenyl) sulfoxides, bis-(hydroxyphenyl) ketones, bis-(hydroxyphenyl) sulfones and α,α-bis-(hydroxyphenyl)diisopropylbenzenes together with the ring-brominated and/or ring-chlorinated derivatives thereof.

30

bis-(hydroxyphenyl) sulfones and α,α -bis-(hydroxyphenyl)diisopropylbenzenes together with the ring-brominated and/or ring-chlorinated derivatives thereof.

Particularly preferred diphenols are 4,4'-dihydroxydiphenyl, bisphenol A, 2,4-bis-
5 (4-hydroxyphenyl)-2-methylbutane, 1,1-bis-(4-hydroxyphenyl)cyclohexane, 1,1-bis-
(4-hydroxyphenyl)-3,3,5-trimethylcyclohexane, 4,4'-dihydroxydiphenyl sulfide, 4,4'-
dihydroxydiphenyl sulfone together with the di- and tetrabrominated or chlorinated
derivatives thereof, such as for example 2,2-bis-(3-chloro-4-hydroxyphenyl)propane,
2,2-bis-(3,5-dichloro-4-hydroxyphenyl)propane or 2,2-bis-(3,5-dibromo-4-hydroxy-
10 phenyl)propane.

2,2-Bis-(4-hydroxyphenyl)propane (bisphenol A) is particularly preferred.

The diphenols may be used individually or as any desired mixtures.

15 The diphenols are known from the literature or are obtainable using processes known
from the literature.

Chain terminators suitable for the production of the thermoplastic, aromatic
20 polycarbonates are, for example, phenol, p-chlorophenol, p-tert.-butylphenol or 2,4,6-
tribromophenol, as well as long-chain alkylphenols, such as 4-(1,3-tetramethylbutyl)-
phenol according to DE-OS 2 842 005 or monoalkylphenol or dialkylphenols having a
total of 8 to 20 C atoms in the alkyl substituents, such as 3,5-di-tert.-butylphenol,
p-iso-octylphenol, p-tert.-octylphenol, p-dodecylphenol and 2-(3,5-dimethylheptyl)-
25 phenol and 4-(3,5-dimethylheptyl)phenol. The quantity of chain terminators to be
used is generally between 0.5 mol.% and 10 mol.%, relative to sum of moles of the
diphenols used in each case.

The thermoplastic, aromatic polycarbonates have weight average molecular weights (M_w , measured for example by ultracentrifugation or light scattering) of 10000 to 200000, preferably of 20000 to 80000.

5 The thermoplastic, aromatic polycarbonates may be branched in a known manner, preferably by incorporating 0.05 to 2.0 mol.%, relative to the sum of diphenols used, of trifunctional or greater than trifunctional compounds, for example those having three and more than three phenolic groups.

10 Both homopolycarbonates and copolycarbonates are suitable. Component A copolycarbonates according to the invention may be produced by also using 1 to 25 wt.%, preferably 2.5 to 25 wt.% (relative to the total quantity of diphenols to be used) of polydiorganosiloxanes having hydroxy-aryloxy end groups. These are known (*c.f.* for example US patent 3 419 634) or may be produced using processes known
15 from the literature. The production of copolycarbonates containing polydiorganosiloxanes is described, for example, in DE-OS 3 334 782.

Preferred polycarbonates, apart from bisphenol A homopolycarbonates, are copolycarbonates of bisphenol A with up to 15 mol.%, relative to the sum of moles of
20 diphenols, of other diphenols mentioned as preferred or particularly preferred, in particular 2,2-bis-(3,5-dibromo-4-hydroxyphenyl)propane.

Aromatic dicarboxylic acid dihalides for the production of aromatic polyester carbonates are preferably the diacid dichlorides of isophthalic acid, terephthalic acid,
25 diphenyl ether 4,4'-dicarboxylic acid and 2,6-naphthalenedicarboxylic acid.

Mixtures of the diacid dichlorides of isophthalic acid and terephthalic acid in a ratio of between 1:20 and 20:1 are particularly preferred.

A carbonic acid halide, preferably phosgene, is additionally used as a difunctional acid derivative in the production of polyester carbonates.

Chain terminators which may be considered for the production of the aromatic polyester carbonates are, apart from the above-mentioned monophenols, also the

5 chlorocarbonic acid esters thereof and the acid chlorides of aromatic monocarboxylic acids, which may optionally be substituted by C_1 - C_{22} alkyl groups or by halogen atoms, together with aliphatic C_2 - C_{22} monocarboxylic acid chlorides.

10 The quantity of chain terminators is in each case 0.1 to 10 mol.%, relative, in the case of phenolic chain terminators, to the number of moles of diphenols and, in the case of monocarboxylic acid chloride chain terminators, to the number of moles of dicarboxylic acid dichlorides.

15 The aromatic polyester carbonates may also contain incorporated aromatic hydroxycarboxylic acids.

The aromatic polyester carbonates may be both linear and branched in a known manner (*c.f.* in this connection also DE-OS 2 940 024 and DE-OS 3 007 934).

20 Branching agents which may be used are, for example, tri- or polyfunctional carboxylic acid chlorides, such as trimesic acid trichloride, cyanuric acid trichloride, 3,3',4,4'-benzophenonetetracarboxylic acid tetrachloride, 1,4,5,8-naphthalenetetracarboxylic acid tetrachloride or pyromellitic acid tetrachloride, in quantities of 0.01 to

25 1.0 mol.% (relative to dicarboxylic acid dichlorides used) or tri- or polyfunctional phenols, such as phloroglucinol, 4,6-dimethyl-2,4,6-tri-(4-hydroxyphenyl)-2-heptene, 4,4-dimethyl-2,4,6-tri-(4-hydroxyphenyl)heptane, 1,3,5-tri-(4-hydroxyphenyl)-benzene, 1,1,1-tri-(4-hydroxyphenyl)ethane, tri-(4-hydroxyphenyl)phenylmethane, 2,2-bis-[4,4-bis-(4-hydroxyphenyl)cyclohexyl]propane, 2,4-bis-(4-hydroxy-

30 phenylisopropyl)phenol, tetra-(4-hydroxyphenyl)methane, 2,6-bis-(2-hydroxy-5-

methylbenzyl)-4-methylphenol, 2-(4-hydroxyphenyl)-2-(2,4-dihydroxyphenyl)-propane, tetra-(4-[4-hydroxyphenylisopropyl]phenoxy)methane, 1,4-bis[4,4'-dihydroxytriphenyl)methyl]benzene, in quantities of 0.01 to 1.0 mol.%, relative to diphenols used. Phenolic branching agents may be introduced initially with the
5 diphenols, acid chloride branching agents may be introduced together with the acid dichlorides.

The proportion of carbonate structural units in the thermoplastic, aromatic polyester carbonates may be varied at will. The proportion of carbonate groups is preferably up
10 to 100 mol.%, in particular up to 80 mol.%, particularly preferably up to 50 mol.%, relative to the sum of ester groups and carbonate groups. Both the ester and carbonate fractions of the aromatic polyester carbonates may be present in the form of blocks or randomly distributed in the polycondensation product.

15 The relative solution viscosity (η_{rel}) of the aromatic polycarbonates and polyester carbonates is in the range from 1.18 to 1.4, preferably from 1.22 to 1.3 (measured on solutions of 0.5 g of polycarbonate or polyester carbonate in 100 ml of methylene chloride solution at 25°C).

20 The thermoplastic, aromatic polycarbonates and polyester carbonates may be used alone or as any desired mixture with each other.

Component B

25 The rubber-modified graft polymer B comprises a random (co)polymer of monomers B.1.1 and B.1.2 together with a rubber B.2 grafted with the random (co)polymer of B.1.1 and B.1.2, wherein B is produced in a known manner using a bulk or solution or bulk/suspension polymerisation process, as for example described in US 3 243 481, US 3 509 237, US 3 660 535, 4 221 833 and US 4 239 863.

Examples of monomers B.1.1 are styrene, α -methylstyrene, halo- or alkyl-ring-substituted styrenes, such as p-methylstyrene, p-chlorostyrene, (meth)acrylic acid C₁-C₈ alkyl esters such as methyl methacrylate, n-butyl acrylate and t-butyl acrylate. Examples of monomers B.1.2 are unsaturated nitriles such as acrylonitrile, methacrylonitrile, (meth)acrylic acid C₁-C₈ alkyl esters such as methyl methacrylate, n-butyl acrylate, t-butyl acrylate, derivatives (such as anhydrides and imides) of unsaturated carboxylic acids such as maleic anhydride and N-phenylmaleimide or mixtures thereof.

- 10 Preferred monomers B.1.1 are styrene, α -methylstyrene and/or methyl methacrylate, preferred monomers B.1.2 are acrylonitrile, maleic anhydride and/or methyl methacrylate.

Particularly preferred monomers are B.1.1 styrene and B.1.2 acrylonitrile.

- 15 Rubbers B.2 suitable for the rubber-modified graft polymers B are, for example, diene rubbers, EP(D)M rubbers, *i.e.* those based on ethylene/propylene and optionally diene, acrylate, polyurethane, silicone, chloroprene and ethylene/vinyl acetate rubbers.

- 20 Preferred rubbers B.2 are diene rubbers (for example based on butadiene, isoprene *etc.*) or mixtures of diene rubbers or copolymers of diene rubbers or mixtures thereof with further copolymerisable monomers (for example according to B.1.1 and B.1.2), providing that the glass transition temperature of component B.2 is <10°C, preferably <-10°C. Pure polybutadiene rubber is particularly preferred.

- 25 Component B may, if necessary and if the rubber properties of component B.2 are not consequently impaired, additionally also contain small quantities, conventionally less than 5 wt.%, preferably less than 2 wt.%, relative to B.2, of ethylenically unsaturated monomers having a crosslinking action. Examples of such monomers having a crosslinking action are alkylene diol di(meth)acrylates, polyester di(meth)acrylates,
- 30

divinylbenzene, trivinylbenzene, triallyl cyanurate, allyl (meth)acrylate, diallyl maleate and diallyl fumarate.

5 The rubber-modified graft polymer B is obtained by graft polymerisation of 50 to 99, preferably 65 to 98, particularly preferably 75 to 97 parts by weight of a mixture of 50 to 99, preferably 60 to 95 parts by weight of monomers B.1.1 and 1 to 50, preferably 5 to 40 parts by weight of monomers B.1.2 in the presence of 1 to 50, preferably 2 to 35, particularly preferably 2 to 15, in particular 2 to 13 parts by weight of rubber component B.2, wherein graft polymerisation is performed by a bulk or solution or
10 bulk/suspension polymerisation process.

It is essential when producing the rubber-modified graft polymers B that the rubber component B.2 is present in dissolved form in the mixture of monomers B.1.1 and B.1.2 before the graft polymerisation. The rubber component B.2 must accordingly
15 neither be so strongly crosslinked that it cannot be dissolved in B.1.1 and B.1.2, nor may B.2 already be in the form of discrete particles at the beginning of the graft polymerisation. The particle morphology and increasing crosslinking of B.2, which are important for the product properties of B, only develop during the course of the graft polymerisation (*c.f.* for example in this connection Ullmann, *Encyclopädie der*
20 *technischen Chemie*, volume 19, pp. 284 *et seq.*, 4th edition 1980).

Part of the random copolymer of B.1.1 and B.1.2 is conventionally present in the polymer B in grafted form on or in the rubber B.2, wherein this graft copolymer forms discrete particles in the polymer B. The proportion of the copolymer of B.1.1 and B.1.2 so grafted relative to the entire copolymer of B.1.1 and B.1.2, *i.e.* the grafting
25 yield (= weight ratio of graft monomers actually grafted to the total graft monomers used $\times 100$, stated in %) should here be 2 to 40%, preferably 3 to 30%, particularly preferably 4 to 20%.

The average particle diameter of the resultant grafted rubber particles (determined by counting on electron micrographs) is in the range from 0.5 to 5 μm , preferably from 0.8 to 2.5 μm .

5 **Component C**

Component C comprises one or more thermoplastic vinyl (co)polymers C.1. and/or polyalkylene terephthalates C.2.

10 Suitable (co)polymers C.1 are polymers of at least one monomer from the group of vinyl aromatics, vinyl cyanides (unsaturated nitriles), (meth)acrylic acid ($\text{C}_1\text{-C}_8$)-alkyl esters, unsaturated carboxylic acids and derivatives (such as anhydrides and imides) of unsaturated carboxylic acids. Particularly suitable (co)polymers are those prepared from

15 C.1.1 50 to 99, preferably 60 to 80 parts by weight of vinyl aromatics and/or ring-substituted vinyl aromatics such as for example styrene, α -methylstyrene, p-methylstyrene, p-chlorostyrene) and/or methacrylic acid ($\text{C}_1\text{-C}_8$)-alkyl esters such as for example methyl methacrylate, ethyl methacrylate) and

20 C.1.2 1 to 50, preferably 20 to 40 parts by weight of vinyl cyanides (unsaturated nitriles) such as acrylonitrile and methacrylonitrile and/or (meth)acrylic acid ($\text{C}_1\text{-C}_8$)-alkyl esters (such as for example methyl methacrylate, n-butyl acrylate, t-butyl acrylate) and/or unsaturated carboxylic acids (such as maleic acid) and/or derivatives (such as anhydrides and imides) of unsaturated
25 carboxylic acids (for example maleic anhydride and N-phenylmaleimide).

The (co)polymers C.1 are resinous, thermoplastic and rubber-free.

30 The copolymer of C.1.1 styrene and C.1.2 acrylonitrile is particularly preferred.

The (co)polymers C.1 are known and may be produced by free-radical polymerisation, in particular by emulsion, suspension, solution or bulk polymerisation. The (co)polymers preferably have molecular weights \overline{M}_w (weight average, determined by light scattering or sedimentation) of between 15000 and 200000.

The component C.2 polyalkylene terephthalates are reaction products of aromatic dicarboxylic acids or the reactive derivatives thereof, such as dimethyl esters or anhydrides, and aliphatic, cycloaliphatic or araliphatic diols, together with mixtures of these reaction products.

Preferred polyalkylene terephthalates contain at least 80 wt.%, preferably at least 90 wt.%, relative to the dicarboxylic acid component, of terephthalic acid residues and at least 80 wt.%, preferably at least 90 mol.%, relative to the diol component, of ethylene glycol and/or 1,4-butanediol residues.

In addition to terephthalic acid residues, the preferred polyalkylene terephthalates may contain up to 20 mol.%, preferably up to 10 mol.%, of residues of other aromatic or cycloaliphatic dicarboxylic acids having 8 to 14 C atoms or aliphatic dicarboxylic acids having 4 to 12 C atoms, such as for example residues of phthalic acid, isophthalic acid, 2,6-naphthalenedicarboxylic acid, 4,4'-diphenyldicarboxylic acid, succinic acid, adipic acid, sebacic acid, azelaic acid, cyclohexanediadic acid.

In addition to ethylene glycol or 1,4-butanediol residues, the preferred polyalkylene terephthalates may contain up to 20 mol.%, preferably up to 10 mol.%, of other aliphatic diols having 3 to 12 C atoms or cycloaliphatic diols having 6 to 21 C atoms, for example residues of 1,3-propanediol, 2-ethyl-1,3-propanediol, neopentyl glycol, 1,5-pentanediol, 1,6-hexanediol, 1,4-cyclohexanedimethanol, 3-ethyl-2,4-pentanediol, 2-methyl-2,4-pentanediol, 2,2,4-trimethyl-1,3-pentanediol, 2-ethyl-1,3-hexanediol, 2,2-diethyl-1,3-propanediol, 2,5-hexanediol, 1,4-di-(β -hydroxyethoxy)benzene, 2,2-

bis-(4-hydroxycyclohexyl)propane, 2,4-dihydroxy-1,1,3,3-tetramethylcyclobutane, 2,2-bis-(4- β -hydroxyethoxyphenyl)propane and 2,2-bis-(4-hydroxypropoxyphenyl)-propane (DE-OS 2 407 674, 2 407 776, 2 715 932).

- 5 The polyalkylene terephthalates may be branched by incorporating relatively small quantities of tri- or tetrahydric alcohols or tri- or tetrabasic carboxylic acids, for example according to DE-OS 1 900 270 and US-PS 3 692 744. Examples of further preferred branching agents are trimesic acid, trimellitic acid, trimethylolethane and trimethylolpropane and pentaerythritol.

10

Particularly preferred polyalkylene terephthalates are those solely produced from terephthalic acid and the reactive derivatives thereof (for example the dialkyl esters thereof) and ethylene glycol and/or 1,4-butanediol, and mixtures of these polyalkylene terephthalates.

15



Mixtures of polyalkylene terephthalates contain 1 to 50 wt.%, preferably 1 to 30 wt.%, of polyethylene terephthalate and 50 to 99 wt.%, preferably 70 to 99 wt.%, of polybutylene terephthalate.

- 20 The preferably used polyalkylene terephthalates generally have an intrinsic viscosity of 0.4 to 1.5 dl/g, preferably of 0.5 to 1.2 dl/g, measured in phenol/o-dichlorobenzene (1:1 parts by weight) at 25°C in a Ubbelohde viscosimeter.

- 25 The polyalkylene terephthalates may be produced using known methods (*c.f.* for example *Kunststoff-Handbuch*, volume VIII, pp. 695 *et seq.*, Carl Hanser Verlag, Munich 1973).

Component D

Component D phosphazenes which are used according to the present invention are linear phosphazenes of the formula (Ia) and cyclic phosphazenes of the formula (Ib)

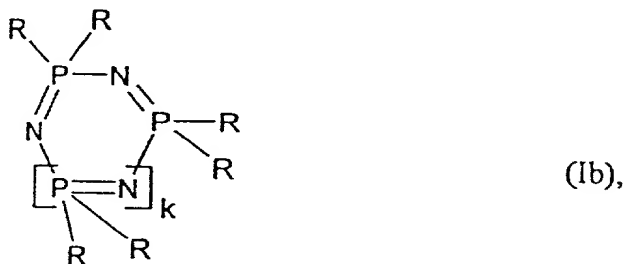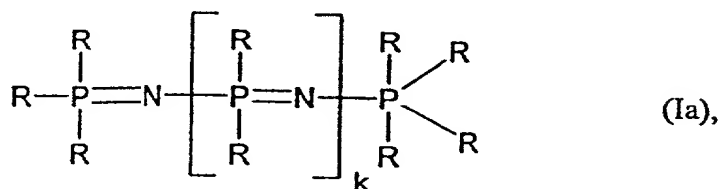

wherein

R and k have the above-stated meaning.

The following may be mentioned by way of example:

propoxyphosphazene, phenoxyphosphazene, methylphenoxyphosphazene, amino-phosphazene and fluoroalkylphosphazenes.

Phenoxyphosphazene is preferred.

The phosphazenes may be used alone or as a mixture. The residue R may always be identical or two or more residues in the formula (Ia) and (Ib) may be different.

The phosphazenes and the production thereof are described, for example, in EP-A 728 811, DE-A 1 961 668 and WO 97/40092.

Component E

5

The fluorinated polyolefins E are of a high molecular weight and have glass transition temperatures of above -30°C , generally of above 100°C , fluorine contents preferably of 65 to 76, in particular of 70 to 76 wt.%, average particle diameters d_{50} of 0.05 to 1000, preferably of 0.08 to 20 μm . The fluorinated polyolefins E preferably have a
10 density of 1.2 to 2.3 g/cm^3 . Preferred fluorinated polyolefins E are polytetrafluoroethylene, polyvinylidene fluoride, tetrafluoroethylene/hexafluoropropylene and ethylene/tetrafluoroethylene copolymers. The fluorinated polyolefins are known (*c.f.* *Vinyl & Related Polymers* by Schildknecht, John Wiley & Sons Inc., New York, 1962, pp. 484-494; *Fluoropolymers* by Wall, Wiley-Interscience, John Wiley & Sons
15 Inc., New York, volume 13, 1970, pp. 623-654; *Modern Plastics Encyclopedia*, 1970-1971, volume 47, no. 10 A, October 1970, McGraw-Hill Inc., New York, pp. 134 and 774; *Modern Plastics Encyclopedia*, 1975-1976, October 1975, volume 52, no. 10A, McGraw-Hill Inc., New York, pp. 27, 28 and 472 and US-PS 3 671 487, 3 723 373 and 3 838 092).

20

They may be produced using known processes, thus for example by polymerising tetrafluoroethylene in an aqueous medium with a free-radical forming catalyst, for example sodium, potassium or ammonium peroxydisulfate, at pressures of 7 to 71 kg/cm^2 and at temperatures of 0 to 200°C , preferably at temperatures of 20 to
25 100°C . (*c.f.* for example US patent 2 393 967 for further details). Depending upon the form in which they are used, the density of these materials may be between 1.2 and 2.3 g/cm^3 , the average particle size between 0.5 and 1000 μm .

Polyolefins E preferred according to the invention are tetrafluoroethylene polymers
30 having average particle diameters of 0.05 to 20 μm , preferably of 0.08 to 10 μm , and a

density of 1.2 to 1.9 g/cm³ and are preferably used in the form of a coagulated mixture of emulsions of tetrafluoroethylene polymers E with emulsions of a graft polymer.

5 Suitable polyolefins E usable in powder form are tetrafluoroethylene polymers having average particle diameters of 100 to 1000 µm and densities of 2.0 g/cm³ to 2.3 g/cm³.

10 A coagulated mixture of a graft polymer B and component E is produced by firstly mixing an aqueous emulsion (latex) of a graft polymer B with a finely divided emulsion of a tetraethylene polymer E; suitable tetrafluoroethylene polymer emulsions conventionally have solids contents of 30 to 70 wt.%, in particular of 50 to 60 wt.%, preferably of 30 to 35 wt.%.

15 The equilibrium weight ratio of graft polymer to tetrafluoroethylene polymer E in the emulsion mixture is 95:5 to 60:40. The emulsion mixture is then coagulated in a known manner, for example by spray drying, freeze drying or coagulation by addition of inorganic or organic salts, acids, bases or organic, water-miscible solvents, such as alcohols, ketones, preferably at temperatures of 20 to 150°C, in particular of 50 to 100°C. If necessary, drying may be performed at 50 to 200°C, preferably at 70 to 100°C.

20 Suitable tetrafluoroethylene polymer emulsions are conventional commercial products and are offered for sale, for example, by DuPont as Teflon® 30 N.

25 The moulding compositions according to the invention may contain at least one of the conventional additives, such as lubricants and mould release agents, nucleating agents, anti-static agents, stabilisers as well as dyes and pigments.

30 The moulding compositions according to the invention may contain up to 35 wt.%, relative to the overall moulding composition, of a further, optionally synergistic flame retardant. Examples of further flame retardants which may be mentioned are organic

halogen compounds, such as decabromobisphenyl ether, tetrabromobisphenol, inorganic halogen compounds such as ammonium bromide, nitrogen compounds, such as melamine, melamine/formaldehyde resins, inorganic hydroxide compounds, such as Mg, Al hydroxide, inorganic compounds such as antimony oxides, barium metaborate, hydroxoantimonate, zirconium oxide, zirconium hydroxide, molybdenum oxide, ammonium molybdate, zinc borate, ammonium borate, barium metaborate, talc, silicate, silicon oxide and tin oxide, as well as siloxane compounds.

The moulding compositions according to the invention containing components A to E and optionally further known additives such as stabilisers, dyes, pigments, lubricants and mould release agents, nucleating agents, as well as anti-static agents, are produced by mixing the particular constituents in a known manner and melt-compounding and melt-extruding them at temperature of 200°C to 300°C in conventional units such as internal kneaders, extruders and twin-screw extruders, wherein component E is preferably used in the form of the above-mentioned coagulated mixture.

The individual constituents may be mixed in a known manner both in succession and simultaneously and both at approx. 20°C (room temperature) and at a higher temperature.

The present invention accordingly also provides a process for the production of the moulding compositions.

By virtue of their excellent flame resistance and good mechanical properties, the thermoplastic moulding compositions according to the invention are suitable for the production of mouldings of all kinds, in particular those having severe requirements with regard to processing behaviour.

Such applications include components of a complicated structure having two or more injection points and thin-walled casing parts having wall thicknesses of <2 mm, preferably of <1.5 mm.

- 5 The moulding compositions of the present invention may be used for the production of mouldings of any kind. Mouldings may in particular be produced by injection moulding. Examples of mouldings which may be produced are: casings of all kinds, for example for domestic appliances such as juice extractors, coffee machines, food mixers, for office equipment, such as monitors, printers, copiers or cladding sheet for
10 the building sector and automotive components. They may also be used in electrical engineering applications as they have very good electrical properties.

Another processing method is the production of mouldings by thermoforming of previously produced sheet or film.

- 15 The present invention accordingly also provides the use of the moulding compositions according to the invention for the production of mouldings of all kinds, preferably those stated above, and the mouldings made from the moulding compositions according to the invention.

- 20 The moulding compositions according to the invention may furthermore, for example, be used to produce the following mouldings or shaped articles:

- Interior trim for rail vehicles (FR)
25 Hub-caps
Casings for electrical devices containing small transformers
Casings for information dissemination and transmission devices
Casings and cladding for medical purposes
Massage devices and casings therefor
30 Toy vehicles for children

10

5

Thermally insulated transport containers

Mouldings for sanitary and bathroom installations

Mouldings for summer houses and sheds

Casings for garden appliances.

Examples

Component A

- 5 Linear bisphenol A based polycarbonate having a relative solution viscosity of 1.26, measured in CH_2Cl_2 as solvent at 25°C and a concentration of 0.5 g/100 ml.

Component B


- 10 B.1 Bulk ABS polymer from DOW Chemical Company, Midland, Michigan, USA
 (trade name Magnum 3504)
 Acrylonitrile:butadiene:styrene = 22.0:10.2:67.8
- 15 B.2 Comparison
 Graft polymer of 40 parts by weight of a copolymer of styrene and acrylonitrile in a 73:27 ratio on 60 parts by weight of crosslinked particulate polybutadiene rubber (average particle diameter $d_{50} = 0.28 \mu\text{m}$), produced by emulsion polymerisation.

- 20 **Component C**

Styrene/acrylonitrile copolymer having a styrene/acrylonitrile weight ratio of 72:28 and an intrinsic viscosity of 0.55 dl/g (measured in dimethylformamide at 20°C).

Component D

Phenoxyphosphazene of the formula

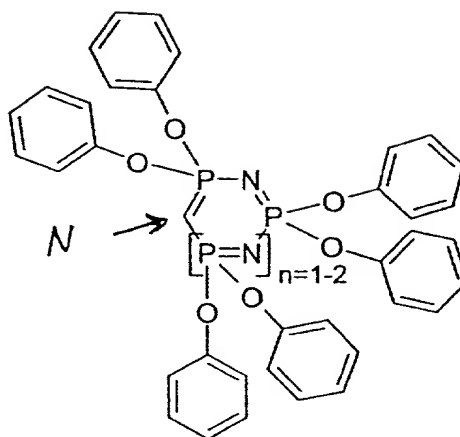

Commercial product P-3800 from Nippon Soda Co. Ltd., Japan.

Pentaerythritol tetrastearate is used as mould release agent.

Component E

- 20 Tetrafluoroethylene polymer as a coagulated mixture prepared from an SAN graft polymer emulsion (graft polymer of 40 parts by weight of a copolymer of styrene and acrylonitrile in a 73:27 ratio on 60 parts by weight of particulate, crosslinked polybutadiene rubber, produced by emulsion polymerisation, average particle diameter $d_{50} = 0.28 \mu\text{m}$) in water and a tetrafluoroethylene polymer emulsion in water.
- 25 The weight ratio of graft polymer B to the tetrafluoroethylene polymer E in the mixture is 90 wt.% : 10 wt.%. The tetrafluoroethylene polymer has a solids content of 60 wt.%, the average particle diameter is between 0.05 and 0.5 μm . The SAN graft polymer emulsion has a solids content of 34 wt.% and an average latex particle diameter of $d_{50} = 0.28 \mu\text{m}$.

30

Production of E

5 The emulsion of the tetrafluoroethylene polymer (Teflon 30 N from DuPont) is mixed with the emulsion of the SAN graft polymer B and stabilised with 1.8 wt.%, relative to polymer solids, of phenolic anti-oxidants. At 85 to 95°C, the mixture is coagulated at pH 4 to 5 with an aqueous solution of MgSO_4 (Epsom salts) and acetic acid, filtered and washed until virtually free of electrolytes, then the principal quantity of water is removed by centrifugation and the material then dried at 100°C to yield a powder. This powder may be compounded with the other components in the units described.

10

Production and testing of the moulding compositions according to the invention

The components are mixed in a 3 litre internal kneader. The mouldings are produced at 260°C on an Arburg model 270 E injection moulding machine.

15

The Vicat B softening point is determined to DIN 53 460 (ISO 306) on bars of dimensions $80 \times 10 \times 4$ mm.

20

Stress cracking behaviour (ESC behaviour) was investigated on bars of dimensions $80 \times 10 \times 4$ mm, processing temperature 260°C. The test medium used was a mixture of 60 vol.% toluene and 40 vol.% isopropanol. The test pieces were pre-stressed on a circular arc template (initial elongation in percent) and immersed in the test medium at room temperature. Stress cracking behaviour was evaluated on the basis of cracking or failure as a function of initial elongation in the test medium.

25

Thermogravimetric analysis (TGA) is used as a measure of the formation of deposits on the mould. To this end, the loss in mass of the mixtures was determined under N_2 as an inert gas in the temperature range from 0 to 400°C with a heating rate of 10 K/min. The loss in mass at a temperature of 280°C, corresponding to conventional processing temperatures, was used for evaluation purposes. The higher is the

30

numerical value, the greater is the tendency towards the formation of deposits during processing. Low values indicate a low tendency towards the formation of deposits.

Table: Moulding compositions and properties thereof (stated in parts by weight)

5

	1	2	3	4	5 (Comp.)
Components					
A	66.7	66.7	60.7	75.0	66.7
B1	16.7	14.2	16.7	10.4	-
B2	-	-	-	-	7.3
C	-	2.0	-	-	9.4
D	12.0	12.0	18.0	10.0	12.0
E	4.2	4.2	4.2	4.2	4.2
Mould release agent	0.4	0.4	0.4	0.4	0.4
Properties					
ak (ISO 180/1A) [kJ/m ²]	55	54	53	58	54
Vicat B 120 [°C]	108	108	99	105	107
UL 94 V, 1.6 mm	V-0	V-0	V-0	V-0	V-0
ESC behaviour, failure at ϵ_x (%)	2.4	2.4	2.0	2.4	2.2
MVR (240/5), ISO 1133 (cm ³ /10 min)	13.6	15.3	26.6	10.3	8.4
TGA Loss in mass at 280°C (%)	0.56	0.55	0.57	0.51	0.75

The moulding compositions according to the invention are distinguished by a favourable combination flame resistance and mechanical properties. Moreover, there is the surprising finding that moulding compositions containing the bulk ABS exhibit further advantages with regard to processing. Both flow behaviour (MVR) and loss in mass, which may be considered a measure of the formation of deposits which occurs

10

under processing conditions, are distinctly more favourable (approx. 20%) than in moulding compositions containing emulsion ABS.

Patent Claims

1. Thermoplastic moulding compositions containing

5 A) 40 to 99 parts by weight of aromatic polycarbonate and/or polyester carbonate


B) 0.5 to 60 parts by weight of graft polymer produced by bulk, solution or bulk/suspension polymerisation processes of

10 B.1) 50 to 99 wt.% of one or more vinyl monomers on


B.2) 50 to 1 wt.% of one or more grafting backbones having a glass transition temperature of $<10^{\circ}\text{C}$

15 C) 0 to 45 parts by weight of at least one thermoplastic polymer selected from the group comprising vinyl (co)polymers and polyalkylene terephthalates,

20 D) 0.1 to 50 parts by weight of at least one component selected from the group comprising phosphazenes of the formulae

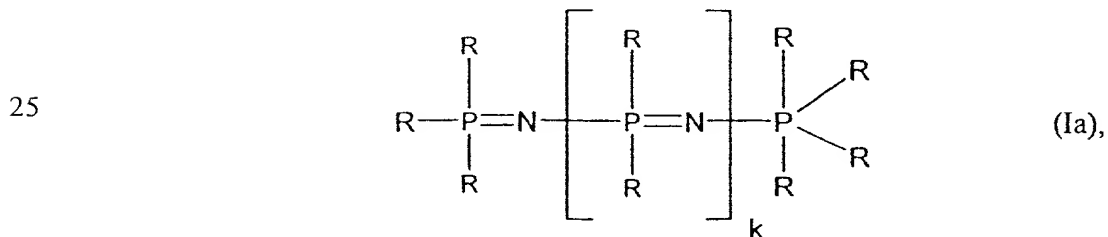

5



(Ib),

in which

10

R is in each case identical or different and denotes amino, C₁ to C₆ alkyl, in each case optionally halogenated, preferably halogenated with fluorine, or C₁ to C₈ alkoxy, C₅ to C₆ cycloalkyl, C₆ to C₂₀ aryl, preferably phenyl or naphthyl, C₆ to C₂₀ aryloxy, preferably phenoxy, naphthyloxy, or C₇ to C₁₂ aralkyl, preferably phenyl-C₁-C₄-alkyl, in each case optionally substituted by alkyl, preferably C₁-C₄ alkyl, and/or halogen, preferably chlorine, bromine,

15

k denotes 0 or a number from 1 to 15, preferably a number from 1 to 10,

20

E) 0 to 5 parts by weight of fluorinated polyolefin.

2. Moulding compositions according to claim 1 containing

25

60 to 98.5 parts by weight of A

1 to 40 parts by weight of B

0 to 30 parts by weight of C

2 to 35 parts by weight of D and

30

0.1 to 1 part by weight of E.

3. Moulding compositions according to claims 1 and 2 containing 2 to 25 parts by weight of C.
- 5 4. Moulding compositions according to claims 1 to 3 containing 5 to 25 parts by weight of D.
5. Moulding compositions according to the preceding claims, wherein vinyl monomers B.1 are mixtures prepared from
10 B.1.1 styrene, α -methylstyrene, halo- or alkyl-ring-substituted styrenes and/or (meth)acrylic acid C₁-C₈ alkyl esters and
B.1.2 unsaturated nitriles, (meth)acrylic acid C₁-C₈ alkyl esters and/or
15 derivatives of unsaturated carboxylic acids.
6. Moulding compositions according to the preceding claims, wherein the grafting backbone is selected from among at least one rubber from the group comprising diene rubbers, EP(D)M rubbers, acrylate, polyurethane, silicone,
20 chloroprene and ethylene/vinyl acetate rubber.
7. Moulding compositions according to the preceding claims containing at least one additive selected from the group comprising lubricants and mould release agents, nucleating agents, anti-static agents, stabilisers, dyes and pigments.
25
8. Moulding compositions according to the preceding claims containing further flame retardants which differ from component D.

9. Process for the production of moulding compositions according to claim 1, wherein components A to E and optionally further additives are mixed and melt-compounded.
- 5 10. Use of the moulding compositions according to claim 1 for the production of mouldings.
11. Mouldings produced from moulding compositions according to claims 1 to 8.

Flame-resistant polycarbonate/ABS moulding compositions

A b s t r a c t

The present invention relates to polycarbonate/ABS moulding compositions with incorporated phosphazenes which exhibit excellent flame resistance and very good processing characteristics, wherein the graft polymer is produced by bulk, solution or bulk/suspension polymerisation processes.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought

on the invention entitled

"FLAME RESISTANT POLYCARBONATE/ABS PLASTIC MOLDING MATERIALS"

the specification of which is attached hereto,

or was filed on **June 12, 1999**

as a PCT Application Serial No. **PCT/EP99/04060**

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s), the priority(ies) of which is/are to be claimed:

198 28 541.8
(Number)

Germany
(Country)

June 26, 1998
(Month/Day/Year Filed)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose the material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Le A 33 087-US

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

JOSEPH C. GIL, Patent Office Registration Number 26,602
ARON PREIS, Patent Office Registration Number 29,426
LYNDANNE M. WHALEN, Patent Office Registration Number 29,457
THOMAS W. ROY, Patent Office Registration Number 29,582
RICHARD E. L. HENDERSON, Patent Office Registration Number 31,619
GODFRIED R. AKORLI, Patent Office Registration Number 28,779
N. DENISE BROWN, Patent Office Registration Number 36,097
NOLAND J. CHEUNG, Patent Office Registration Number 39,138
DIDERICO VAN EYL, Patent Office Registration Number 38,641
CAROLYN M. SLOANE, Patent Office Registration Number 44,339
JAMES R. FRANKS, Patent Office Registration Number 42,552

all of Bayer Corporation, Pittsburgh, Pennsylvania 15205-9741

Send Correspondence To: Patent Department Bayer Corporation 100 Bayer Road Pittsburgh, Pennsylvania 15205-9741	Direct Telephone Calls To: (412) 777-2349
--	--

FULL NAME OF SOLE OR FIRST INVENTOR <u>Thomas Eckel</u>	INVENTOR'S SIGNATURE <u>Thomas Eckel</u>	DATE <u>2010-11-20</u>
RESIDENCE <u>D 41540 Dormagen, Germany DEX</u>	CITIZENSHIP <u>German</u>	
POST OFFICE ADDRESS <u>c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany</u>		
FULL NAME OF SECOND INVENTOR <u>Michael Zobel</u>	INVENTOR'S SIGNATURE <u>Michael Zobel</u>	DATE <u>19.11.00</u>
RESIDENCE <u>D 40547 Düsseldorf, Germany DEX</u>	CITIZENSHIP <u>German</u>	
POST OFFICE ADDRESS <u>c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany</u>		
FULL NAME OF THIRD INVENTOR <u>Dieter Wittmann</u>	INVENTOR'S SIGNATURE <u>Dieter Wittmann</u>	DATE <u>17.11.00</u>
RESIDENCE <u>D 51375 Leverkusen, Germany DEX</u>	CITIZENSHIP <u>German</u>	
POST OFFICE ADDRESS <u>c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany</u>		
FULL NAME OF FOURTH INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF FIFTH INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF SIXTH INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF SEVENTH INVENTOR	INVENTOR'S SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		